

6BN4A

Medium-Mu Triode

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3	volts
Current	0.2	amp

Direct Interelectrode Capacitances (Approx.):^a

Grid to plate	1.2	$\mu\mu\text{f}$
Grid to cathode and heater	3.2	$\mu\mu\text{f}$
Plate to cathode and heater	1.4	$\mu\mu\text{f}$


Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	150	volts
Cathode Resistor.	220	ohms
Amplification Factor.	43	
Plate Resistance (Approx.).	5400	ohms
Transconductance.	7700	μmhos ←
Plate Current	9	ma
Grid Volts (Approx.) for plate $\mu\text{a} = 100$	-6	volts

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/2" \pm 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	See <i>General Section</i>
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No. E7-1)
Basing Designation for BOTTOM VIEW.	7EG

Pin 1—Cathode
Pin 2—Grid
Pin 3—Heater
Pin 4—Heater



Pin 5—Plate
Pin 6—Cathode
Pin 7—Grid

AMPLIFIER — Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	275 max.	volts
GRID VOLTAGE:		
Positive-bias value	0 max.	volts
CATHODE CURRENT	22 max.	ma
PLATE DISSIPATION	2.2 max.	watts

← Indicates a change.



RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA
1-62

6BN4A

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	100 max.	volts
Heater positive with respect to cathode.	100 max.	volts

Maximum Circuit Values:

Grid-Circuit Resistance	0.5 max.	megohm
-----------------------------------	----------	--------

^a With external shield JEDEC No.316 connected to cathode.






6BN4-A

6BN4-A

AVERAGE PLATE CHARACTERISTICS

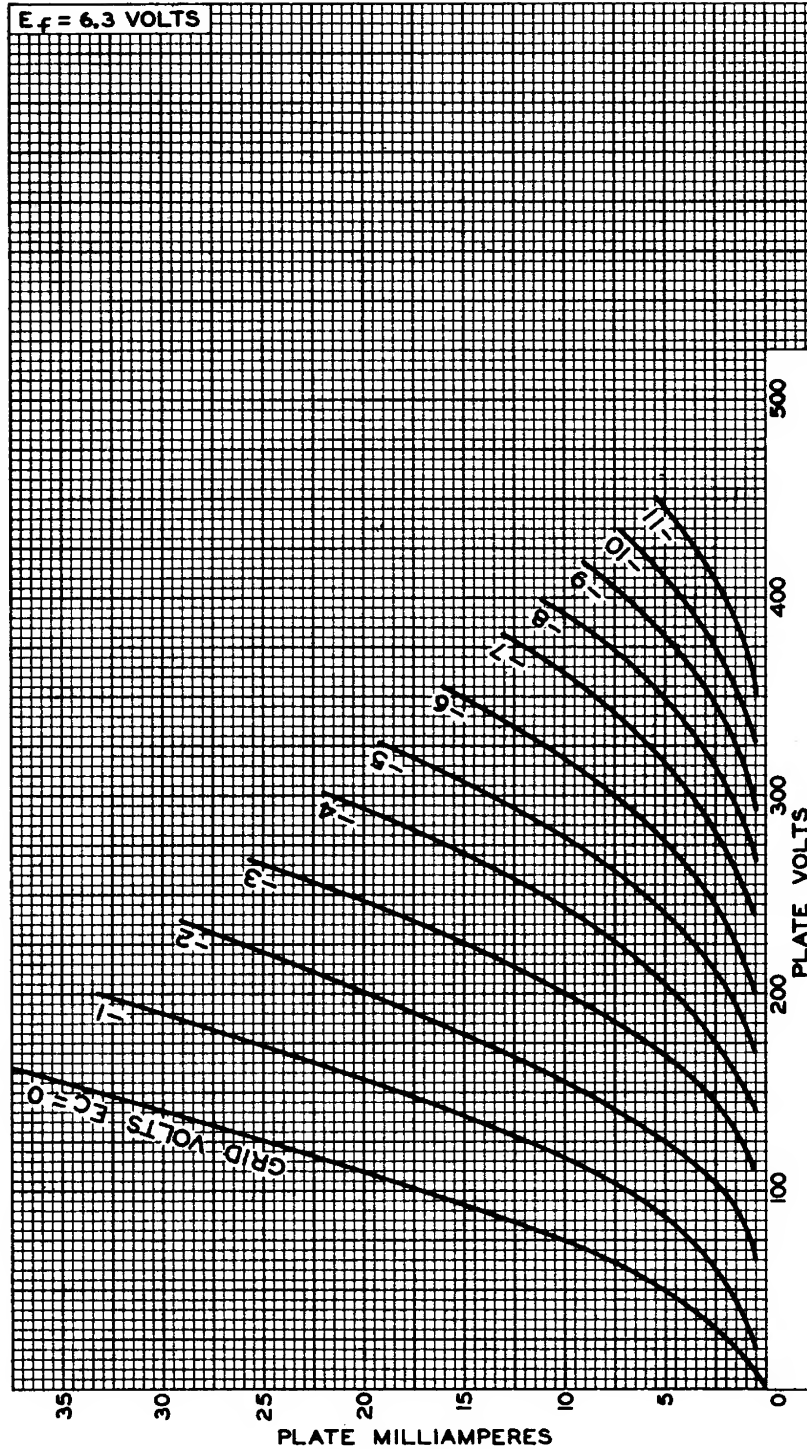

6BN4-A



6BN4-A

AVERAGE CHARACTERISTICS

